

Phone: (405) 224-4046 Fax: (405) 224-9423 Email: Info@HSISensing.com Web: www.hsisensing.com

Address: 3100 Norge Road, Chickasha, OK 73018

Item Number HSR-1016R Series Contact Form A Switch Configuration SPST Rev. B

Form A Miniature Reed Switch

| Features | Advantages |
|---|--|
| Hermetically sealed contactsUnique blade design and surface finishSwitch materials are Lead free and RoHS compliant | Extended operation in extreme environments Not ESD sensitive Ideal for proximity sensors and reed relays |

Electrical Specifications


| Power | | Watts - maximum | 10 |
|-------------|----------------------------|-----------------|-------------|
| Voltage | Switching | VDC - maximum | 200 |
| | Breakdown | VDC - minimum | 400 |
| Current | Switching | Amp - maximum | 0.5 |
| | Carry | Amp - maximum | 1.5 |
| Resistance | Initial Contact Resistance | Ohm - maximum | 0.15 |
| | Insulation Resistance | Ohm - minimum | 1 E11 |
| Capacitance | Contact | pF - typical | 0.9 |
| Temperature | Operating | °C - maximum | -40 to +125 |
| | Storage | °C | -40 to +200 |

Magnetic Specifications

| Pull - In Range | Ampere Turns | 15-40 |
|-----------------|---------------|---------|
| Test Coil | NARM RS-421-A | Coil II |

Physical/Operational Specifications

| | | • | |
|------------------|------------------|--------------------|---------|
| Capsule Volume | Excluding Leads | CC - nominal | 0.1 |
| Contact Material | | | Rhodium |
| Operate Time | Including Bounce | mSeconds - maximum | 0.70 |
| Release Time | | mSeconds - maximum | 0.20 |

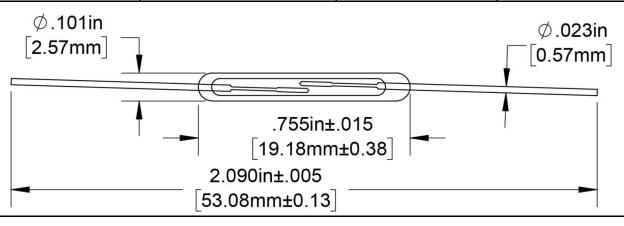

Notes:

- (1) Specifications are not constant across entire magnetic range.
- (2) Customer must exercise care in handling, mounting, lead forming, and cutting to prevent damage to glass capsule and/or switch sensitivity.
- (3) For information or custom configurations about performance, mounting options or packaging, contact our Sales department.
- (4) Information contained hereon is for informational purposes only and should not be deemed as accurate for a specific application. Consult factory for specific application information and/or latest revision.